

DUMP TRAILERS



LOAD TRAIL

DS

DS05 | DS07 6" I-Beam Frame Single Axle Dump | 5,200 - 7,000 Lb GVWR



Stock photo. May be shown with additional options.

Available Sizes

LENGTH	WEIGHT	Cubic Y.D.
48" X 8'	1,641 lbs.	1.78
60" X 8'	1,826 lbs.	2.22
60" X 10'	2,017 lbs.	2.78
72" X 10'	2,808 lbs.	4.44
*[Base Weight Estimate Only]		
*[Some sizes not available with different axle ratings.]		
Deck Height - 26"		



SCISSOR HOIST STANDARD



17 COLORS

STANDARD SPECIFICATIONS

*listed specs based on DS05 base model

- 5,200 lb GVWR
- 5,200 lb GAWR (ea. axle)
- 2" 4-Hole Adjustable Coupler
- (2) - Safety Chains
- (1) 7,000 lb Drop-Leg Jack
- (1) 5,200 lb Dexter 1 Elec/Spring Axles (Forward Self Adjust)
- 15" 6-Hole Wheels
- ST225/75 R15 LRD Tires
- Multi-Leaf Spring Suspension
- 6" I-Beam Tongue
- 6" I-Beam Frame
- 2" x 4" Tubing Bed Frame
- 4" Channel Cross-members in Frame
- 3" Channel Bed 16" OC Cross-members
- 10 Ga. 18" High Sides
- Front Tongue Mount Tool Box
- 10 Ga. Smooth Plate Flooring
- Steel Diamond Plate Fenders (Weld-On)
- 3-Way Spreader Gate
- Double Acting Power Hydraulic Unit
- 3.5" x 9.25" x 1.5" Cylinder W/ SCISSOR HOIST
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- E-Z Lock Mesh Tarp System With Cover
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

- 1 - 5200 Lb Dexter 1 Elec/Spring (FSA)
- 1 - 5200 Lb Dexter 1 Hyd Drum/Spring
- 1 - 7000 Lb Dexter 1 Elec/Spring (FSA)

COUPLER OPTIONS

- 2" Adjustable Coupler (4 Hole)
- 2-5/16" Adjustable Coupler (4 Hole)
- 3" Adjustable Pintle Ring (4 Hole)
- 3" Adjustable Pintle Ring (6 Hole)

GATES & RAMPS

- Side Mount Ramps (58"x12")
- 24" Tall Dump Sides
- 36" Tall Dump Sides
- 48" Tall Dump Sides
- MAX-Bed (see notes*)

OTHER OPTIONS

- ST235/80 R16 LRE Tires
- ST235/85 R16 LRG Tires
- Additional 3" or 4" D-rings
- Mud Flaps
- Wireless Hyd. Remote
- 12v In-line charger (20 amp)
- Solar Panel Charger
- Rapid Battery Wall Charger (8 Amp)
- Spare Tire Mount
- Spare Wheel & Tire
- Rear Support Stands (Tube)
- 24" Exp. Metal Extensions
- Solid Metal Extensions

NOTES

MAX-Bed option available on 60" x 10' model only.





DT07 | DT10 | DT14


6-8" I-Beam Frame Tandem Axle Dump | 7,000lb - 14,000lb GVWR



Stock photo. May be shown with additional options.

Available Sizes

LENGTH	WEIGHT	Cubic Y.D.
60" X 10'	2,017 lbs.	3.70
72" X 10'	2,930 lbs.	4.44
72" X 12'	3,080 lbs.	5.33
83" X 10'	3,537 lbs.	5.12
83" X 12'	3,688 lbs.	6.15
83" X 14'	4,105 lbs.	7.17
83" X 16'	4,369 lbs.	8.20
*Base Weight Estimate Only		
*Some sizes not available with different axle ratings.		
Deck Height - DT07 29" DT10 29" DT14 32" (deck height drops approx. 4" w/drop axle option)		



GOOSENECK AVAILABLE



SCISSOR HOIST STANDARD



17 COLORS

STANDARD SPECIFICATIONS

*listed specs based on DT14 base model

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 8" I-Beam Tongue
- 8" I-Beam Frame
- 2" x 4" or 2" x 6" Tubing Bed Frame
- 5" Channel Cross-members in Frame
- 3" Channel Bed 16" OC Cross-members
- (2) 7,000lb Dexter Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires
- Multi-Leaf Spring Suspension
- 2-5/16" Adjustable Coupler
- Tongue-Mount Tool Box
- Power Up/Power Down Hydraulic System
- 5" x 15.75" x 2" Cylinder w/ Scissor Hoist
- 10 Ga. 24" Tall Sides
- 10 Ga. Smooth Plate Flooring
- Slide-In Ramps
- 2 - Safety Chains
- 1 - 7,000 lb Drop-Leg Jack
- Steel Diamond Plate Fenders
- 3-Way Spreader Gate
- (4) 3" Weld-on D-rings
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/7-way Plug & Front Polar Cord
- E-Z Lock Mesh Tarp System With Cover
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Powdura OneCure Primer w/Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

- (2) 3,500lb Dexter Elec/Spring Axles (FSA)
- (2) 5,200lb Dexter Elec/Spring Axles (FSA)
- (2 or 3) 7,000lb Dexter Elec/Spring Axles (FSA)
- (2 or 3) 8,000lb Dexter Elec/Spring Axles (FSA)

SIDES, GATES & RAMPS

- Side Mount Ramps (58"x12")
- 6' Hydraulic Gate
- 24" Tall Dump Sides
- 36" Tall Dump Sides
- 48" Tall Dump Sides
- MAX-Bed (24" Tall Flared Sides)
- 96" Ramps (available on 16' model)

COUPLER OPTIONS

- 2" Adjustable Coupler (6-hole)
- 2-5/16" Adjustable Coupler (6-hole)
- 3" Adjustable Pintle Ring (6-hole)
- 2-5/16" Round GN Adjustable Coupler
- 2-5/16" Square GN Adjustable Coupler

OTHER OPTIONS

- ST235/80 R16 LRE Tires
- ST235/85 R16 LRG (14 ply) Tires
- ST215/75 R17.5" LRH Tires
- Fork Holders
- 7 Gauge Smooth Plate Floor
- 12" OC Cross-members
- (1 or 2) 10K Drop-leg Jack(s)
- (1 or 2) 10K Hyd. Drop-leg Jack(s)
- 25K 2-Speed Drop-leg Jack(s)
- Wireless Remote
- Solar Panel Charger
- Rapid Battery Charger (8 amp)
- 12v In-line charger (20 amp)
- 3" & 4" Additional D-rings (weld-on)
- Mud Flaps
- 30" MAX-Step
- Spare Tire Mount
- Spare Wheel & Tire
- Rear 5K Swivel Support Jacks
- Rear Tube Support Stands
- Side Door
- Telescopic Cylinder

OTHER OPTIONS

- Telescopic Cylinder
- 3-Way Hydraulic Power Unit
- 24" Solid Metal Side Extensions
- 24" Expanded Metal Side Extensions
- Deck Over Neck (GN model only)
- 6" Cylinder/Scissor Hoist Upgrade

NOTES

Hyd. Brake, Drop, & Torsion axles also available on some models. Side-mount ramp option available on 10' models. Deck height with drop axle option 28". Rear slide-in ramps standard on 12', 14' & 16' models. Hyd. gate must have 36"+ tall sides. Spare wheel & Mount standard on GN models. 2 - 10K dropleg jacks standard with triple axle option. 6" Cylinder with scissor hoist standard on triple axle models.



DH

DH14 | DH21

8" I-Beam Frame Heavy Duty Low-Pro Dump | 14,000lb - 21,000lb GVWR



Stock photo. May be shown with additional options.

Available Sizes

LENGTH	WEIGHT	Cubic Y.D.
83" X 14'	4880	7.17
83" X 16'	5200	8.20
*Base Weight Estimate Only		
*Some sizes not available with different axle ratings.		
Deck Height - 27"		



GOOSENECK AVAILABLE



SCISSOR HOIST STANDARD



17 COLORS

STANDARD SPECIFICATIONS

*listed specs based on DH14 base model

- 14,000 GVWR
- 7,000lb GAWR (ea. axle)
- 2-5/16" Adjustable Coupler (6-Hole)
- 2 - Safety Chains
- 1 - 10,000 lb Drop-leg Jack
- (2) 7,000lb Dexter 2 Elec/Drop Axles
- 16" 8-Hole Wheels
- ST235/80 R16 LRE Tires
- Multi-Leaf Spring Suspension
- 8" I-Beam Tongue
- 8" I-Beam Frame
- 2" x 6" Tubing Bed Frame
- 5" Channel Cross-members In Frame
- 3" Channel Bed 16" OC Cross-members
- 10 Ga. 24" Tall Fully Formed Sides w/ MAX-Rail
- 7 Ga. Smooth Plate Flooring
- 80" Rear Slide-in Ramps
- 2-Tier Tongue-mount Tool Box
- Steel Diamond Plate Fenders
- 3-Way Spreader Gate
- (4) 3" Weld-on D-rings
- Dual Acting Power Hydraulic Unit
- 5" x 15.75" x 2" Cylinder W/ Scissor Hoist
- LED Lighting
- 16 Ga. 5-Way Duble-Insulated Harness w/ 7-way Plug & Front Polar Cord
- E-Z Lock Mesh Tarp System With Cover
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Powdura OneCure Primer, w/ Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

- (2 or 3) 7,000lb Dexter Elec/Drop Axles
- (2) 8,000lb Dexter Elec/Drop Axles

SIDES, GATES & RAMPS

- 96" Rear Slide-in Ramps (16' Only)

COUPLER OPTIONS

- 2-5/16" Adjustable Coupler (6-hole)
- 3" Adjustable Pintle Ring (6-hole)
- 2-5/16" Round GN Adjustable Coupler
- 2-5/16" Square GN Adjustable Coupler

OTHER OPTIONS

- ST235/80 R16 LRE Tires
- ST235/85 R16 LRG (14 ply) Tires
- ST215/75 R17.5" LRH Tires
- Fork Holders
- 12" OC Cross-members
- (2) 10K Drop-leg Jacks(s)
- (2) 10K Hyd. Drop-leg Jack(s)
- 25K 2-Speed Drop-leg Jack(s)
- Wireless Remote
- Solar Panel Charger
- Rapid Battery Charger (8 amp)
- 12v In-line charger (20 amp)
- 3" & 4" Additional D-rings (weld-on)
- Mud Flaps
- 30" MAX-Step
- Spare Tire Mount
- Spare Wheel & Tire
- Rear 5K Swivel Support Jacks
- Rear Tube Support Stands

OTHER OPTIONS

- 3-Way Hydraulic Power Unit
- 24" Solid Metal Side Extensions
- 24" Expanded Metal Side Extensions
- Deck Over Neck (GN model only).

NOTES

- Hydraulic brake axles also available.
- Spare wheel & tire standard on gooseneck model.



DZ | DZ14 | DZ21

8" I-Beam Frame Heavy Duty Dump | 14,000lb - 21,000lb GVWR



Stock photo. May be shown with additional options.

Available Sizes

LENGTH	WEIGHT	Cubic Y.D.
96" X 12'	3,686 lbs.	5.33
96" X 14'	3,991 lbs.	6.22
96" X 16'	4,296 lbs.	7.11
*Base Weight Estimate Only		
Deck Height - 33"		



GOOSENECK AVAILABLE



SCISSOR HOIST STANDARD



17 COLORS

STANDARD SPECIFICATIONS

*listed specs based on DZ14 base model

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 2-5/16, 6-hole Adjustable Coupler
- 2 - Safety Chains
- 1 - 7,000 lb Drop-Leg Jack
- 7,000lb Dexter 2 Elec/Spring Axles
- 16" 8-Hole Wheels
- ST235/80 R16 LRE Tires
- Multi-Leaf Spring Suspension
- 10" I-Beam Tongue
- 10" I-Beam Frame
- 2" x 6" Tubing Bed Frame
- 4" Channel Cross-members in Frame
- 3" Channel Bed 16" OC Cross-members
- 10 Ga. 18" Tall Fold-down Sides
- 10 Ga. Smooth Plate Flooring
- 80" Rear Slide-in Ramps*
- Tongue-mount Tool Box
- 3-Way Spreader Gate
- (4) 3" Weld-on D-rings
- Dual Acting Power Hydraulic Unit
- 5" x 15.75" x 2" Cylinder W/ SCISSOR HOIST
- LED Lighting
- 16Ga. 5-way Dual-Insulated Harness w/7-way Plug & Front Polar Cord
- E-Z Lock Mesh Tarp System With Cover
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Powdura OneCure Primer w/Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

- (2 or 3) 7,000lb Dexter Elec/Spring Axles
- (2) 8,000lb Dexter Elec/Spring Axles

SIDES, GATES & RAMPS

- 96" Rear Slide-in Ramps (16' Only)
- 24" Tall Sides (weld on only)
- 36" Tall Sides (weld on only)
- 48" Tall Sides (weld on only)

COUPLER OPTIONS

- 2-5/16" Adjustable Coupler (6-hole)
- 3" Adjustable Pintle Ring (6-hole)
- 2-5/16" Round GN Adjustable Coupler
- 2-5/16" Square GN Adjustable Coupler

OTHER OPTIONS

- ST235/80 R16 LRE Tires
- ST235/85 R16 LRG (14 ply) Tires
- ST215/75 R17.5" LRH Tires
- 7 Gauge Smooth Plate Floor
- 12" OC Cross-members
- (1 or 2) 10K Drop-leg Jack(s)
- (1 or 2) 10K Hyd. Drop-leg Jack(s)
- 25K 2-Speed Drop-leg Jack(s)
- Side-mount toolbox.
- Wireless Remote
- Solar Panel Charger
- Rapid Battery Charger (8 amp)
- 12v In-line charger (20 amp)
- 3" & 4" Additional D-rings (weld-on)
- Mud Flaps
- Spare Tire Mount
- Spare Wheel & Tire
- Rear 5K Swivel Support Jacks
- Rear Tube Support Stands
- 3-Way Hydraulic Power Unit
- Deck Over Neck (GN model only)

NOTES

Hydraulic brake axles also available. Side-mount toolbox available only on 16' model. Spare wheel & tire standard on gooseneck model.



GM

GM14 | GM16 | GM21

8" I-Beam Frame Drop-N-Go

Dump | 14,000lb - 21,000lb GVWR

Available Sizes

LENGTH	WEIGHT	Cubic Y.D.
83" X 14'	8,150 lbs.	12.5
83" X 16'	9,008 lbs.	14.3
*Base Weight Estimate Only		
Listed weights shown Frame w/Box		
Deck Height - 31"		

*Frame and Box Sold Individually

Extra Boxes Available


*Flatbed Available on 16' Chassis Only



Stock photo. May be shown with additional options.



FLATBED AVAILABLE



BP PINTLE AVAILABLE



SCISSOR HOIST STANDARD



17 COLORS

STANDARD SPECIFICATIONS

*listed specs based on GM14 base model

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 2-5/16" Round Adjustable GN Coupler
- 2 - Safety Chains
- (1) - 10000 lb Drop-Leg Jack
- (2) 7,000lb Dexter 2 Elec/Spring Axles
- 16" 8-Hole Wheels
- ST235/80 R16 LRE Tires w/ Spare
- Multi-Leaf Spring Suspension
- 10" I-Beam Tongue
- 8" I-Beam Frame
- 2" x 6" Tubing Bed Frame
- 3" Channel Bed 16" OC Cross-members
- 10 Ga. - 48" Tall Sides
- 10 Ga. Smooth Plate Flooring
- Full-width Front Toolbox
- Steel Diamond Plate Fenders
- 48" Tall Barn Doors
- (4) 3" Weld-on D-rings
- 17.5K Winch w/ Battery & Wired/Wireless Remote
- Dual Acting Power Hydraulic Unit
- 5" x 15.75" x 2" Cylinder w/ Scissor Hoist
- LED Lighting
- 16ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- E-Z Lock Mesh Tarp System With Cover
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

(2 or 3) 7,000lb Dexter Elec/Spring Axles

(2) 8,000lb Dexter Elec/Spring Axles

COUPLER OPTIONS

2-5/16" Round 25K GN Adjustable Coupler

2-5/16" Square 25K GN Adjustable Coupler

2-5/16" Round 30K GN Adjustable Coupler

2-5/16" Square 30K GN Adjustable Coupler

2-5/16" Adjustable Coupler (6-Hole)

3" Adjustable Pintle Ring (6-Hole)

OTHER OPTIONS

ST235/80 R16 LRE Tires

ST235/85 R16 LRG (14 ply) Tires

ST215/75 R17.5" LRH Tires

12" OC Cross-members

(2) 10K Drop-leg Jack(s)

(2) 10K Hyd. Drop-leg Jack(s)

(2) 25K 2-Speed Drop-leg Jack(s)

Wireless Remote

Solar Panel Charger

Rapid Battery Charger (8 amp)

12v In-line charger (20 amp)

3" & 4" Additional D-rings (weld-on)

Mud Flaps

3-Way Hydraulic Power Unit

Deck Over Neck (GN model only)

NOTES

Hydraulic brake axles also available on this model. Spare wheel & tire standard on gooseneck model only.



GX

GX22 | GX24 | GX30 **12" I-Beam Frame Gooseneck** **Deckover Dump | 22,000lb -** **30,000lb GVWR**




Stock photo. May be shown with additional options.

Available Sizes

LENGTH	WEIGHT	Cubic Y.D.
102" X 16'	8,368 lbs.	20.15
102" X 18'	8,777 lbs.	22.67
102" X 20'	9,190 lbs.	25.19
102" X 22'	9,400 lbs.	27.70
*Base Weight Estimate Only		
Deck Height - 36"		



STANDARD ON ALL TANDEM & TRIPLE, DUAL WHEEL CONFIGURATIONS



BP PINTLE AVAILABLE



SCISSOR HOIST STANDARD



17 COLORS

STANDARD SPECIFICATIONS

**listed specs based on GX14 base model*

- 22,000 lb GVWR
- 10,000 lb GAWR (ea. axle)
- 2-5/16" Round Adjustable GN Coupler
- 2 - Safety Chains
- (2) 10,000 lb Drop-Leg Jacks
- (2) 10,000lb Dexter 2 Elec/Spring Axles
- 16" 8-Hole Wheels
- ST235/80 R16 LRE Tires w/ Spare
- Heavy Duty Adjustable Suspension System (HDSS)
- 12" I-Beam Tongue
- 12" I-Beam Frame
- 2" x 5" Tubing Bed Frame
- 10" I-beam Cross-members In Frame
- 3" Channel 16" OC Bed Cross-members
- 10 Gauge 48" Tall Removable Sides
- 10 Gauge Smooth Plate Flooring
- 8' Rear Slide-in Ramps (Channel)
- Full Width Front Toolbox
- 3-Way Spreader Gate
- (4) 3" Weld-on D-rings
- Dual Acting Power Hydraulic Unit
- 6" x 29" x 2-3/4" Cylinder w/ Scissor Hoist
- LED Lighting
- 16ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- E-Z Lock Mesh Tarp System With Cover
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

- (2) 10,000lb Dexter Elec/Spring Axles
- (2) 12,000lb Dexter Elec/Spring Axles
- (2) 15,000lb Dexter Elec/Spring Axles

SIDES, GATES & RAMPS

- 24" Tall Removable Sides
- 36" Tall Removable Sides
- 48" Tall Removable Sides
- 72" Tall Removable Sides
- Grain Chute

COUPLER OPTIONS

- 2-5/16" Round 25K GN Adjustable Coupler
- 2-5/16" Square 25K GN Adjustable Coupler
- 2-5/16" Round 30K GN Adjustable Coupler
- 2-5/16" Square 30K GN Adjustable Coupler
- 2-5/16" Adjustable Coupler (6-Hole)
- 3" Adjustable Pintle Ring (6-Hole)

OTHER OPTIONS

- ST235/80 R16 LRE Tires
- ST235/85 R16 LRG (14 ply) Tires
- ST215/75 R17.5" LRH Tires
- 7 Gauge Smooth Plate Floor
- 12" OC Cross-members
- (2) 10K Drop-leg Jack(s)
- (2) 10K Hyd. Drop-leg MAX-Jack(s)
- (2) 25K 2-Speed Drop-leg Jack
- Wireless Remote
- Solar Panel Charger
- Rapid Battery Charger (8 amp)
- 12v In-line charger (20 amp)
- 3" & 4" Additional D-rings (weld-on)
- 12" MAX-Step
- Spare Tire Mount
- Spare Wheel & Tire
- Rear Tube Support Stands
- 3-Way Hydraulic Power Unit
- 6" or 12" Raised Neck & Coupler
- Deck Over Neck (GN model only)
- (1 or 2) 48" Side-mount Toolbox
- Fold-down Spare Tire Mount

NOTES

Torsion, hyd. brake, air brake axles also available on this model. Fold-down spare tire mount available on gooseneck model only. 48" side-mount toolbox available on gooseneck model only. Spare wheel & tire standard on gooseneck model only



POPULAR OPTIONS



Solar Panel Charger



24" Solid Metal Extensions



Fork Holders



10,000lb Drop-Leg Jack



Rear Support Stands



36" Tall Sides w/6' Hyd. Gate



48" Tall Sides




30" MAX-Step



Dump Side-Door

KEY ADVANTAGES

- Industry Best Warranty
- Roadside Assistance
- National Dealer Network
- Commercial Grade Construction
- Dexter E-Z Lube® Axles
- Dexter NEV-R Adjust™ Forward Self Adjusting Electric Brake Axles
- Sherwin-Williams® Powder Coat & Primer
- Primer Standard
- Radial Tires Standard
- Powder Coated Wheels
- One-Piece Formed Sides On Most Models
- D-Rings and Stake Pockets
- I-Beam Frame Construction
- 16" On Center Cross-members
- Recessed LED Lighting
- NATM Compliant
- Sandblasted and Zirconium Washed
- Premium Fully Sealed Wiring Harness w/ Polar Cord
- Hand Pinstriping
- Innovative Design
- Endless Options for Customization
- Made In USA

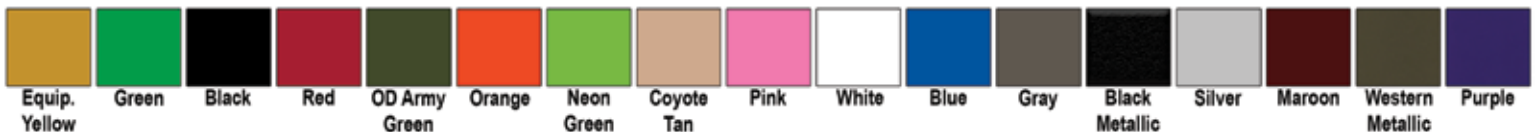

AUTHORIZED DEALER
03-2015

