

# ***HEAVY DUTY DECKOVERS***



**LOAD  TRAIL**

# GH

**GH14 | GH16 | GH21  
GH22 | GH24 | GH30**  
Heavy Duty 12" I-Beam Goose-  
neck Deckover | 14,000 -  
30,000 Lb GVWR



Stock photo. May be shown with additional options.

## Available Sizes

LENGTH	WEIGHT
102" X 20'	4,984 lbs.
102" X 22'	5,208 lbs.
102" X 24'	5,427 lbs.
102" X 25'	5,543 lbs.
102" X 26'	5,728 lbs.
102" X 28'	5,952 lbs.
102" X 30'	6,188 lbs.
102" X 32'	6,412 lbs.
102" X 34'	6,645 lbs.
102" X 36'	6,875 lbs.
102" X 38'	7,100 lbs.
102" X 40'	8,362 lbs.
*Base Weight Estimate Only	
Deck Height - 37"	



TRIPLE AXLE AVAILABLE



STANDARD ON ALL TANDEM  
& TRIPLE, DUAL  
WHEEL CONFIGURATIONS



17 COLORS

## STANDARD SPECIFICATIONS

\*standard specs based on GH22 base model

- 22,000 lb GVWR
- 10,000 lb GAWR (ea. axle)
- 12" I-Beam Neck
- 12" 19 lbs./ft I-Beam Frame
- 3" Channel 16" OC Cross-members
- (2) 10,000 lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires w/ Spare
- HDSS - Dexter Heavy Duty Adjustable Suspension System
- (2) 10,000 lb Drop-Leg Jacks
- 2-5/16" Round Adjustable GN Coupler (25K)
- (2) - Safety Chains
- Full-width Front Tool Box
- 2" Rub Rail, Pipe Spools & Stake Pockets
- Treated Pine Flooring
- Straight Deck w/8' Slide-In Ramps
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/Polyester TGIC Gloss Powder Topcoat

## AXLE OPTIONS

- (2 or 3) 7,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 8,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 10,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 12,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 15,000 Lb Dexter 2 Elec/Spring (FSA)

## COUPLER OPTIONS

- 2-5/16" Rd. Adjustable GN Coupler (25K or 30K)
- 2-5/16" Sq. Adjustable GN Coupler (25K or 30K)

## GATES DOVETAILS, & RAMPS

- 5' Dove w/Slide-In Ramps
- 5' Dove w/Stand-Up Ramps
- 5' Dove w/ 2 or 3 Flip-Over Ramps
- 5' Dove w/Max-Ramps
- 5' Dove w/4', 5' or 6' HD Fold Gate
- 5' Dove w/4', 5' or 6' HD Split Gate
- 5' Center Pop-up w/ 2 Flip-Over Ramps
- Dozer Package

## OTHER OPTIONS

- ST235/85 R16 LRG (14 Ply)
- ST215/75 R17.5 LRH (Singles or Duals)
- 12" 19 lb./ft I-Beam Frame
- Locking Chain Rack
- Deck-Over-Neck (102" X 96" w/45° corners)
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Lumber Floor
- 12" OC Cross-Members
- (2) 25K Drop-Leg 2-Speed Jacks
- (2) Hydraulic Jacks (MAX-Jack)
- LED Light Bar (Single or Dual Row)
- 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- 6" Raised Neck & Coupler
- 12" Raised Neck & Coupler
- (1 or 2) 48" or 72" Side Mount Tool Box(s)
- Top Riser Toolbox
- Fold Down Spare Tire Mount
- Rear Support Stands (Tube)
- (1 or 2) 12" MAX-Step(s)
- Additional Stake Pockets
- Under Frame Bridge
- Pipe Bridge

## OTHER OPTIONS

- 9.5K, 12K, or 17.5K Winch Package
- 1/2" Winch plate
- Under Frame Rack
- Spread Axles 6"
- Spread Axles 72"
- Air Ride Suspension w/Lift Axle
- Ratchet Track w/Adjustable Ratchets
- Weld-on Ratchets

## NOTES

Axles also available in torsion, with electric, hydraulic, or air brakes. 5' dove tail options include self-clean or wood. Under-Frame Bridge and Pipe Bridge standard on 36' and up. Dexter Heavy Duty Adjustable Suspension System standard on all tandem & triple, dual wheel configurations. 17.5" Wheels & Tires standard with 15K axle option. 12" x 22lb/ft I-Beam standard with 15K axle option. ST215/75 R17.5 LRH Super Singles available with 10K axle option only.



# GR

## GR14 | GR16 | GR21 GR22 | GR24 | GR30 Heavy Duty 12" I-Beam Gooseneck Deckover w/ Hydraulic Dovetail 14,000lb - 30,000 Lb GVWR



Stock photo. May be shown with additional options.

### Available Sizes

LENGTH	WEIGHT
102" X 26'	6,360 lbs.
102" X 28'	6,709 lbs.
102" X 30'	6,941 lbs.
102" X 32'	7,173 lbs.
102" X 34'	7,405 lbs.
102" X 36'	8,565 lbs.
102" X 38'	8,970 lbs.
102" X 40'	8,210 lbs.
*Base Weight Estimate Only *Some sizes not available with different axle ratings.	
Deck Height - 37"	



TRIPLE AXLE AVAILABLE



STANDARD ON ALL TANDEM  
& TRIPLE, DUAL  
WHEEL CONFIGURATIONS



17 COLORS

### STANDARD SPECIFICATIONS

\*standard specs based on GR22 base model

- 22,000 Lb GVWR
- 10,000 lb GAWR (ea. axle)
- 12" I-Beam Neck
- 12" 19 lbs./ft I-Beam Frame
- 3" Channel Bed 16" OC Cross-members
- 9' Hydraulic Dove Tail
- (2) 10,000 Lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires w/ Spare
- HDSS - Dexter Heavy Duty Adjustable Suspension System
- (2) 10,000 Lb Drop-Leg Jacks
- 2-5/16" Round Adjustable GN Coupler (25K)
- (2) Safety Chains
- Front Full-width Toolbox
- 2" Rub Rail, Pipe Spools & Stake Pockets
- Dual Acting Hydraulic Power Unit
- 3" x 10" Cylinder w/ 1.25" Shaft
- 12v Interstate Battery
- Treated Pine Floor
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin Williams Powdura OneCure, Primer w/ Polyester TGIC Gloss Powder Topcoat

### AXLE OPTIONS

(2 or 3) 7,000 Lb Dexter 2 Elec/Spring (FSA)  
(2 or 3) 8,000 Lb Dexter 2 Elec/Spring (FSA)  
(2 or 3) 10,000 Lb Dexter 2 Elec/Spring (FSA)  
(2 or 3) 12,000 Lb Dexter 2 Elec/Spring (FSA)  
(2 or 3) 15,000 Lb Dexter 2 Elec/Spring (FSA)

### COUPLER OPTIONS

2-5/16" Rd. Adjustable GN Coupler (25K or 30K)  
2-5/16" Sq. Adjustable GN Coupler (25K or 30K)

### GATES DOVETAILS, & RAMPS

9' Self-Clean Hydraulic Dove Tail  
10' Hydraulic Dove Tail  
Cleats on Dove Tail

### OTHER OPTIONS

ST235/85 R16 LRG (14 Ply)  
ST215/75 R17.5 LRH (Singles or Duals)  
12" 19 lb./ft I-Beam Frame  
Locking Chain Rack  
Deck On Neck (102" X 96" w/45° corners)  
Steel Diamond Plate Floor  
Rough Oak Floor  
Douglas Fir Floor  
Blackwood Lumber Floor  
12" OC Cross-Members  
(2) 25K Drop-Leg 2-Speed Jacks  
(2) Hydraulic Jacks (MAX-Jack)  
LED Light Bar (Single or Dual Row)  
8 Amp Charger  
Solar Charger  
Wireless Remote  
3" or 4" D-rings (weld-on, bolt-on, recessed or removable)  
6" Raised Neck & Coupler  
12" Raised Neck & Coupler  
(1 or 2) 48" or 72" Side Mount Tool Box(s)  
Top Riser Toolbox  
Fold Down Spare Tire Mount  
Rear Support Stands (Tube)  
(1 or 2) 12" MAX-Step(s)  
Additional Stake Pockets

### OTHER OPTIONS

Under Frame Bridge  
Pipe Bridge  
9.5K, 12K, or 17.5K Winch Package  
1/2" Winch plate  
Under Frame Rack  
Spread Axles 6"  
Spread Axles 72"  
Air Ride Suspension w/Lift Axle  
Ratchet Track w/Adjustable Ratchets  
Weld-on Ratchets

### NOTES

Axles also available in torsion, with electric, hydraulic, or air brakes. Under-Frame Bridge and Pipe Bridge standard on 36' and up. Dexter Heavy Duty Adjustable Suspension System standard on all tandem & triple, dual wheel configurations. 17.5" Wheels & Tires standard with 15K axle option. 12" x 22lb/ft I-Beam standard with 15K axle option. ST215/75 R17.5 LRH Super Singles available with 10K axle option only.



For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)



# PH

**PH14 | PH16 | PH21 | PH22**  
**PH24 | PH30 Heavy Duty**  
**12" I-Beam Pintle Deckover**  
**14,000 - 30,000 Lb GVWR**



Stock photo. May be shown with additional options.

### Available Sizes

LENGTH	WEIGHT
102" X 20'	4,204 lbs.
102" X 22'	4,436 lbs.
102" X 24'	4,656 lbs.
102" X 25'	4,772 lbs.
102" X 26'	4,955 lbs.
102" X 28'	5,180 lbs.
102" X 30'	5,417 lbs.
102" X 32'	5,641 lbs.
102" X 34'	5,874 lbs.
102" X 36'	6,104 lbs.
102" X 38'	6,329 lbs.
102" X 40'	7,590 lbs.
*[Base Weight Estimate Only]	
Deck Height - 37"	



TRIPLE AXLE AVAILABLE



STANDARD ON ALL TANDEM  
 & TRIPLE, DUAL  
 WHEEL CONFIGURATIONS



17 COLORS

### STANDARD SPECIFICATIONS

\*standard specs based on PH22 base model

<ul style="list-style-type: none"> <li>• 22,000 lb GVWR</li> <li>• 10,000 lb GAWR (ea. axle)</li> <li>• 12" I-Beam Tongue</li> <li>• 12" 19 lbs./ft I-Beam Frame</li> <li>• 3" Channel 16" OC Cross-members</li> <li>• (2) 10,000 lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)</li> <li>• (2) 10,000 lb Drop-Leg Jacks</li> <li>• 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires w/ Spare</li> <li>• HDSS - Dexter Heavy Duty Adjustable Suspension System</li> <li>• 3" Adjustable Pintle Pintle Eye Coupler</li> </ul>	<ul style="list-style-type: none"> <li>• (2) - Safety Chains</li> <li>• In-Tongue Tool Tray</li> <li>• 2" Rub Rail, Pipe Spools &amp; Stake Pockets</li> <li>• Treated Pine Flooring</li> <li>• Straight Deck w/ 8' Slide-In Ramps</li> <li>• LED Lighting</li> <li>• 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug &amp; Front Polar Cord</li> <li>• Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion</li> <li>• Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat</li> </ul>
--	---

### AXLE OPTIONS

- (2 or 3) 7,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 8,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 10,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 12,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 15,000 Lb Dexter 2 Elec/Spring (FSA)

### COUPLER OPTIONS

- 2-5/16" Adjustable BP Coupler
- 3" Adjustable Pintle Ring

### GATES DOVETAILS, & RAMPS

- 5' Dove w/Slide-In Ramps
- 5' Dove w/Stand-Up Ramps
- 5' Dove w/ 2 or 3 Flip-Over Ramps
- 5' Dove w/Max-Ramps
- 5' Dove w/4', 5' or 6' HD Fold Gate
- 5' Dove w/4', 5' or 6' HD Split Gate
- 5' Center Pop-up w/ 2 Flip-Over Ramps
- Dozer Package

### OTHER OPTIONS

- ST235/85 R16 LRG (14 Ply)
- ST215/75 R17.5 LRH (Singles or Duals)
- 12" 19 lb./ft I-Beam Frame
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Lumber Floor
- 12" OC Cross-Members
- (2) 25K Drop-Leg 2-Speed Jacks
- (2) Hydraulic Jacks (MAX-Jack)
- LED Light Bar (Single or Dual Row)
- 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- (1 or 2) 48" or 72" Side Mount Tool Box(s)
- Rear Support Stands (Tube)
- (1 or 2) 12" MAX-Step(s)
- Additional Stake Pockets
- Under Frame Bridge
- Pipe Bridge
- In-Tongue Tool Box
- 9.5K, 12K, or 17.5K Winch Package
- 1/2" Winch plate
- Under Frame Rack
- Spread Axles 6"
- Spread Axles 72"

### OTHER OPTIONS

- Air Ride Suspension w/Lift Axle
- Ratchet Track w/Adjustable Ratchets
- Weld-on Ratchets

### NOTES

Axles also available in torsion, with electric, hydraulic, or air brakes. 5' dove tail options include self-clean or wood. Under-Frame Bridge and Pipe Bridge standard on 36' and up. Dexter Heavy Duty Adjustable Suspension System standard on all tandem & triple, dual wheel configurations. 17.5" Wheels & Tires standard with 15K axle option. 12" x 22lb/ft I-Beam standard with 15K axle option. ST215/75 R17.5 LRH Super Singles available with 10K axle option only.



PR

**PR14 | PR16 | PR21 | PR22**  
**PR24 | PR30 Heavy Duty**  
**12" I-Beam Pintle Deckover**  
**w/Hydraulic Dovetail**  
**14,000lb - 30,000 Lb GVWR**



Stock photo. May be shown with additional options.

### Available Sizes

LENGTH	WEIGHT
102" X 26'	5,589 lbs.
102" X 28'	5,938 lbs.
102" X 30'	6,170 lbs.
102" X 32'	6,402 lbs.
102" X 34'	6,634 lbs.
102" X 36'	7,133 lbs.
102" X 38'	7,365 lbs.
102" X 40'	7,597 lbs.
*[Base Weight Estimate Only]	
*[Some sizes not available with different axle ratings.]	
Deck Height - 37"	



TRIPLE AXLE AVAILABLE



STANDARD ON ALL TANDEM  
& TRIPLE, DUAL  
WHEEL CONFIGURATIONS



17 COLORS

### STANDARD SPECIFICATIONS

\*standard specs based on PR22 base model

- 22,000 Lb GVWR
- 10,000 lb GAWR (ea. axle)
- 12" I-Beam Tongue
- 12" 19 lbs./ft I-Beam Frame
- 3" Channel 16" OC Cross-members
- 9' Hydraulic Dove Tail
- (2) 10,000 Lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires w/ Spare
- HDSS - Dexter Heavy Duty Adjustable Suspension System
- (2) 10,000 Lb Drop-Leg Jacks
- 3" Adjustable Pintle Pintle Eye Couple
- (2) Safety Chains
- In-Tongue Tool Tray
- 2" Rub Rail, Pipe Spools & Stake Pockets
- Dual Acting Hydraulic Power Unit
- 3" x 10" Cylinder w/ 1.25" Shaft
- 12v Interstate Battery
- Treated Pine Floor
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin Williams Powdura OneCure, Primer w/ Polyester TGIC Gloss Powder Topcoat

### AXLE OPTIONS

- (2 or 3) 7,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 8,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 10,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 12,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 15,000 Lb Dexter 2 Elec/Spring (FSA)

### COUPLER OPTIONS

- 2-5/16" Adjustable Coupler
- 3" Adjustable Pintle Ring

### GATES DOVETAILS, & RAMPS

- 9' Self-clean Dove Tail
- 10' Hydraulic Dove Tail
- Cleats on Dove Tail

### OTHER OPTIONS

- ST235/85 R16 LRG (14 Ply)
- ST215/75 R17.5 LRH (Singles or Duals)
- 12" 19 lb./ft I-Beam Frame
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Lumber Floor
- 12" OC Cross-Members
- (2) 25K Drop-Leg 2-Speed Jacks
- (2) Hydraulic Jacks (MAX-Jack)
- LED Light Bar (Single or Dual Row)
- 8 Amp Charger
- Solar Charger
- Wireless Remote
- 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- (1 or 2) 48" or 72" Side Mount Tool Box(s)
- Rear Support Stands (Tube)
- (1 or 2) 12" MAX-Step(s)
- Additional Stake Pockets
- Under Frame Bridge
- Pipe Bridge
- In-Tongue Tool Box
- 9.5K, 12K, or 17.5K Winch Package
- 1/2" Winch plate

### OTHER OPTIONS

- Under Frame Rack
- Spread Axles 6"
- Spread Axles 72"
- Air Ride Suspension w/Lift Axle
- Ratchet Track w/Adjustable Ratchets
- Weld-on Ratchets

### NOTES

Axles also available in torsion, with electric, hydraulic, or air brakes. Under-Frame Bridge and Pipe Bridge standard on 36' and up. Dexter Heavy Duty Adjustable Suspension System standard on all tandem & triple, dual wheel configurations. 17.5" Wheels & Tires standard with 15K axle option. 12" x 22lb/ft I-Beam standard with 15K axle option. ST215/75 R17.5 LRH Super Singles available with 10K axle option only.



# POPULAR OPTIONS



MAX-Step



MAX-Ramps



MAX-Jack (Hydraulic)



LED Light Bar



ST215/75 R17.5 Wheels&Tires




Side-mount Tool Box



Slide Track / Ratchets




Deck-Over-Neck

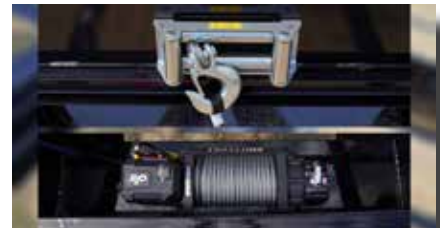

Winch/Winch Plate Combo

## KEY ADVANTAGES

- Industry Best Warranty
- Roadside Assistance
- National Dealer Network
- Commercial Grade Construction
- Dexter E-Z Lube Axles / Oil Bath Axles\*
- Dexter Nev-R Adjust™ Forward Self Adjusting Electric Brake Axles
- Sherwin Williams® Powder Coat
- Primer Standard
- Radial Tires Standard
- Powder Coated Wheels
- Spare Tire Standard
- Built In Wall Charger (hydraulic dove tail models)\*
- Premium Fully Sealed Wiring Harness w/Polar Cord
- 12" I-Beam Neck/Tongue
- 12" x 19 lbs./ft I-Beam Frame
- 3" Channel Cross-members
- Stake Pockets, Pipe Spools & Rub Rails
- Front Tool Box Standard on GN Models
- Pressure Treated 2x6 Decking
- Recessed DOT Compliant LED Lighting
- NATM Compliant
- Sandblasted and Zirconium Washed
- Hand Pinstriping
- Innovative Design
- Endless Options for Customization
- Made in USA

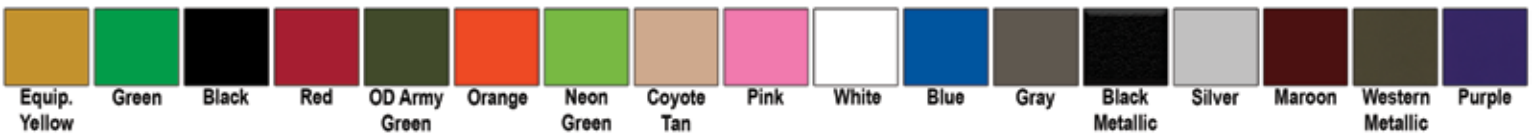

AUTHORIZED DEALER  
03-2015

