

# ***LOW-PRO DECKOVERS***



**LOAD  TRAIL**

# GP

## GP22 | GP24 | GP30 Low-Pro 12" I-Beam Goose- neck Deckover | 22,000 - 30,000 Lb GVWR



Stock photo. May be shown with additional options.

### Available Sizes

LENGTH	WEIGHT
102" X 20'	6,468 lbs.
102" X 22'	6,726 lbs.
102" X 24'	7,002 lbs.
102" X 25'	7,120 lbs.
102" X 26'	7,352 lbs.
102" X 28'	7,639 lbs.
102" X 30'	7,892 lbs.
102" X 32'	8,151 lbs.
102" X 34'	8,415 lbs.
102" X 36'	8,693 lbs.
102" X 38'	8,951 lbs.
102" X 40'	10,191 lbs.
*Base Weight Estimate Only	
Deck Height - 33.5"	



TRIPLE AXLE AVAILABLE



STANDARD ON ALL TANDEM  
& TRIPLE, DUAL  
WHEEL CONFIGURATIONS



17 COLORS

### STANDARD SPECIFICATIONS

\*listed specs based on GP22 base model

- 22,000 lb GVWR
- 10,000 lb GAWR (ea. axle)
- 12" I-Beam Neck
- 12" 19 lb./ft Pierced I-Beam Frame
- 3" Channel 16" OC Crossmembers
- (2) 10,000 lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires w/ Spare
- HDSS - Dexter Heavy Duty Adjustable Suspension System
- (2) 10,000 lb Drop-Leg Jacks
- 2-5/16" Round Adjustable GN Coupler (25K)
- (2) - Safety Chains
- 2" Rub Rail, Pipe Spools & Stake Pockets
- Full-width Front Tool Box
- Treated Pine Flooring
- Straight Deck w/ 8' Slide-In Ramps
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

### AXLE OPTIONS

- (2 or 3) 10,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 12,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 15,000 Lb Dexter 2 Elec/Spring (FSA)

### COUPLER OPTIONS

- 2-5/16" Rd. Adjustable GN Coupler (25K or 30K)
- 2-5/16" Sq. Adjustable GN Coupler (25K or 30K)

### GATES DOVETAILS, & RAMPS

- 5' Dove w/Slide-In Ramps
- 5' Dove w/Stand-Up Ramps
- 5' Dove w/ 2 or 3 Flip-Over Ramps
- 5' Dove w/Max-Ramps
- 5' Dove w/4', 5' or 6' HD Fold Gate
- 5' Dove w/4', 5' or 6' HD Split Gate
- 5' Center Pop-up w/ 2 Flip-Over Ramps
- Dozer Package

### OTHER OPTIONS

- ST235/85 R16 LRG (14 Ply)
- ST215/75 R17.5 LRH (Singles or Duals)
- 12" 19 lb./ft I-Beam Frame
- Locking Chain Rack
- Deck-Over-Neck (102" X 96" w/45° corners)
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Lumber Floor
- 12" OC Cross-Members
- (2) 25K Drop-Leg 2-Speed Jacks
- (2) Hydraulic Jacks (MAX-Jack)
- LED Light Bar (Single or Dual Row)
- 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- 6" Raised Neck & Coupler
- 12" Raised Neck & Coupler
- (1 or 2) 48" or 72" Side Mount Tool Box(s)
- Top Riser Toolbox
- Fold Down Spare Tire Mount
- Rear Support Stands (Tube)
- (1 or 2) 12" MAX-Step(s)
- Additional Stake Pockets
- Under Frame Bridge
- Pipe Bridge

### OTHER OPTIONS

- 9.5K, 12K, or 17.5K Winch Package
- 1/2" Winch plate
- Under Frame Rack
- Spread Axles 6"
- Spread Axles 72"
- Air Ride Suspension w/Lift Axle
- Ratchet Track w/Adjustable Ratchets
- Weld-on Ratchets

### NOTES

Axles also available in torsion, with electric, hydraulic, or air brakes. 5' dove tail options include self-clean or wood. Under-Frame Bridge and Pipe Bridge standard on 36' and up. Dexter Heavy Duty Adjustable Suspension System standard on all tandem & triple, dual wheel configurations. 17.5" Wheels & Tires standard with 15K axle option. 12" x 22lb/ft I-Beam standard with 15K axle option. ST215/75 R17.5 LRH Super Singles available with 10K axle option only.

For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)



# GL

**GL22 | GL24 | GL30**  
**Low-Pro 12" I-Beam**  
**Gooseneck Deckover**  
**w/Hydraulic Dove Tail**  
**22,000 - 30,000 Lb GVWR**

Stock photo. May be shown with additional options.



### Available Sizes

LENGTH	WEIGHT
102" X 26'	7,628 lbs.
102" X 28'	7,884 lbs.
102" X 30'	8,176 lbs.
102" X 32'	8,413 lbs.
102" X 34'	8,745 lbs.
102" X 36'	9,103 lbs.
102" X 38'	9,396 lbs.
102" X 40'	10,543 lbs.
<i>*Base Weight Estimate Only</i>	
Deck Height - 33.5"	



**TRIPLE AXLE AVAILABLE**



**STANDARD ON ALL TANDEM & TRIPLE, DUAL WHEEL CONFIGURATIONS**



**17 COLORS**

### STANDARD SPECIFICATIONS

*\*listed specs based on GL22 base model*

- 22,000 Lb GVWR
- 10,000 lb GAWR (ea. axle)
- 12" I-Beam Neck
- 12" 19 lb./ft Pierced I-Beam Frame
- 3" Channel 16" OC Crossmembers
- 9' Hydraulic Dove Tail
- (2) 10,000 Lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires w/ Spare
- HDSS - Dexter Heavy Duty Adjustable Suspension System
- (2) 10,000 Lb Drop-Leg Jacks
- 2-5/16" Round Adjustable GN Coupler (25K)
- (2) Safety Chains
- 2" Rub Rail, Pipe Spools & Stake Pockets
- Front Full-width Tool Box
- Dual Acting Hydraulic Power Unit
- 3" x 10" Cylinder w/1.25" Shaft
- 12v Interstate Battery
- Treated Pine Floor
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin Williams Powdura OneCure, Primer w/Polyester TGIC Gloss Powder Topcoat

### AXLE OPTIONS

- (2 or 3) 10,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 12,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 15,000 Lb Dexter 2 Elec/Spring (FSA)

### COUPLER OPTIONS

- 2-5/16" Rd. Adjustable GN Coupler (25K or 30K)
- 2-5/16" Sq. Adjustable GN Coupler (25K or 30K)

### GATES DOVETAILS, & RAMPS

- 9' Self-Clean Hydraulic Dove Tail
- 10' Hydraulic Dove Tail
- Cleats on Dove Tail

### OTHER OPTIONS

- ST235/85 R16 LRG (14 Ply)
- ST215/75 R17.5 LRH (Singles or Duals)
- 12" 19 lb./ft I-Beam Frame
- Locking Chain Rack
- Deck-Over-Neck (102" X 96" w/45° corners)
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Lumber Floor
- 12" OC Cross-Members
- (2) 25K Drop-Leg 2-Speed Jacks
- (2) Hydraulic Jacks (MAX-Jack)
- LED Light Bar (Single or Dual Row)
- 8 Amp Charger
- Solar Charger
- Wireless Remote
- 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- 6" Raised Neck & Coupler
- 12" Raised Neck & Coupler
- (1 or 2) 48" or 72" Side Mount Tool Box(s)
- Top Riser Toolbox
- Fold Down Spare Tire Mount
- Rear Support Stands (Tube)
- (1 or 2) 12" MAX-Step(s)
- Additional Stake Pockets

### OTHER OPTIONS

- Under Frame Bridge
- Pipe Bridge
- 9.5K, 12K, or 17.5K Winch Package
- 1/2" Winch plate
- Under Frame Rack
- Spread Axles 6"
- Spread Axles 72"
- Air Ride Suspension w/Lift Axle
- Ratchet Track w/Adjustable Ratchets
- Weld-on Ratchets

### NOTES

Axles also available in torsion, with electric, hydraulic, or air brakes. Under-Frame Bridge and Pipe Bridge standard on 36' and up. Dexter Heavy Duty Adjustable Suspension System standard on all tandem & triple, dual wheel configurations. 17.5" Wheels & Tires standard with 15K axle option. 12" x 22lb/ft I-Beam stanard with 15K axle option. ST215/75 R17.5 LRH Super Singles available with 10K axle option only.

For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)





# PP

**PP22 | PP24 | PP30**  
**Low-Pro 12" I-Beam Pintle**  
**Deckover | 22,000 - 30,000 GVWR**



Stock photo. May be shown with additional options.

### Available Sizes

LENGTH	WEIGHT
102" X 20'	6,468 lbs.
102" X 22'	6,726 lbs.
102" X 24'	7,002 lbs.
102" X 25'	7,120 lbs.
102" X 26'	7,352 lbs.
102" X 28'	7,639 lbs.
102" X 30'	7,892 lbs.
102" X 32'	8,151 lbs.
102" X 34'	8,415 lbs.
102" X 36'	8,693 lbs.
102" X 38'	8,951 lbs.
102" X 40'	10,191 lbs.
<i>*Base Weight Estimate Only</i>	
Deck Height - 33.5"	



**TRIPLE AXLE AVAILABLE**



**STANDARD ON ALL TANDEM & TRIPLE, DUAL WHEEL CONFIGURATIONS**



**17 COLORS**

### STANDARD SPECIFICATIONS

*\*listed specs based on PP22 base model*

- 22,000 lb GVWR
- 10,000 lb GAWR (ea. axle)
- 12" I-Beam Tongue
- 12" 19 lb./ft Pierced I-Beam Frame
- 3" Channel 16" OC Crossmembers
- (2) 10,000 lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires w/ Spare
- HDSS - Dexter Heavy Duty Adjustable Suspension System
- (2) 10,000 lb Drop-Leg Jacks
- 3" Adjustable Pintle Pintle Eye Coupler
- (2) - Safety Chains
- Front In-Tongue Tool Tray
- 2" Rub Rail, Pipe Spools & Stake Pockets
- Treated Pine Flooring
- Straight Deck w/8' Slide-In Ramps
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

### AXLE OPTIONS

- (2 or 3) 10,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 12,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 15,000 Lb Dexter 2 Elec/Spring (FSA)

### COUPLER OPTIONS

- 2-5/16" Adjustable Coupler
- 3" Adjustable Pintle Ring

### GATES DOVETAILS, & RAMPS

- 5' Dove w/Slide-In Ramps
- 5' Dove w/Stand-Up Ramps
- 5' Dove w/ 2 or 3 Flip-Over Ramps
- 5' Dove w/Max-Ramps
- 5' Dove w/4', 5' or 6' HD Fold Gate
- 5' Dove w/4', 5' or 6' HD Split Gate
- 5' Center Pop-up w/ 2 Flip-Over Ramps
- Dozer Package

### OTHER OPTIONS

- ST235/85 R16 LRG (14 Ply)
- ST215/75 R17.5 LRH (Singles or Duals)
- 12" 19 lb./ft I-Beam Frame
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Lumber Floor
- 12" OC Cross-Members
- (2) 25K Drop-Leg 2-Speed Jacks
- (2) Hydraulic Jacks (MAX-Jack)
- LED Light Bar (Single or Dual Row)
- 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- (1 or 2) 48" or 72" Side Mount Tool Box(s)
- Rear Support Stands (Tube)
- (1 or 2) 12" MAX-Step(s)
- Additional Stake Pockets
- Under Frame Bridge
- Pipe Bridge
- In-Tongue Tool Box
- 9.5K, 12K, or 17.5K Winch Package
- 1/2" Winch plate
- Under Frame Rack
- Spread Axles 6"
- Spread Axles 72"

### OTHER OPTIONS

- Air Ride Suspension w/Lift Axle
- Ratchet Track w/Adjustable Ratchets
- Weld-on Ratchets

### NOTES

Axles also available in torsion, with electric, hydraulic, or air brakes. 5' dove tail options include self-clean or wood. Under-Frame Bridge and Pipe Bridge standard on 36' and up. Dexter Heavy Duty Adjustable Suspension System standard on all tandem & triple, dual wheel configurations. 17.5" Wheels & Tires standard with 15K axle option. 12" x 22lb/ft I-Beam stanard with 15K axle option. ST215/75 R17.5 LRH Super Singles available with 10K axle option only.

For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)



# PL

## PL22 | PL24 | PL30

Low-Pro 12" I-Beam Pintle  
Deckover w/ Hydraulic Dove Tail  
22,000 - 30,000 GVWR



Stock photo. May be shown with additional options.

### Available Sizes

LENGTH	WEIGHT
102" X 26'	7,628 lbs.
102" X 28'	7,884 lbs.
102" X 30'	8,176 lbs.
102" X 32'	8,413 lbs.
102" X 34'	8,745 lbs.
102" X 36'	9,103 lbs.
102" X 38'	9,396 lbs.
102" X 40'	10,543 lbs.
<i>*Base Weight Estimate Only</i>	
Deck Height - 33.5"	



TRIPLE AXLE AVAILABLE



STANDARD ON ALL TANDEM  
& TRIPLE, DUAL  
WHEEL CONFIGURATIONS



17 COLORS

### STANDARD SPECIFICATIONS

*\*listed specs based on PL22 base model*

- 22,000 Lb GVWR
- 10,000 lb GAWR (ea. axle)
- 12" I-Beam Tongue
- 12" 19 lb./ft Pierced I-Beam Frame
- 3" Channel 16" OC Crossmembers
- 9' Hydraulic Dove Tail
- (2) 10,000 Lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires w/ Spare
- HDSS - Dexter Heavy Duty Adjustable Suspension System
- (2) 10,000 Lb Drop-Leg Jacks
- 3" Adjustable Pintle Pintle Eye Coupler
- In-Tongue Tool Tray
- (2) Safety Chains
- Dual Acting Hydraulic Power Unit
- 3" x 10" Cylinder w/1.25" Shaft
- 12v Interstate Battery
- 2" Rub Rail, Pipe Spools & Stake Pockets
- Treated Pine Floor
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin Williams Powdura OneCure, Primer w/Polyester TGIC Gloss Powder Topcoat

### AXLE OPTIONS

- (2 or 3) 10,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 12,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 15,000 Lb Dexter 2 Elec/Spring (FSA)

### COUPLER OPTIONS

- 2-5/16" Adjustable Coupler
- 3" Adjustable Pintle Ring

### GATES DOVETAILS, & RAMPS

- 9' Self-Clean Hydraulic Dove Tail
- 10' Hydraulic Dove Tail
- Cleats on Dove Tail

### OTHER OPTIONS

- ST235/85 R16 LRG (14 Ply)
- ST215/75 R17.5 LRH (Singles or Duals)
- 12" 19 lb./ft I-Beam Frame
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Lumber Floor
- 12" OC Cross-Members
- (2) 25K Drop-Leg 2-Speed Jacks
- (2) Hydraulic Jacks (MAX-Jack)
- LED Light Bar (Single or Dual Row)
- 8 Amp Charger
- Solar Charger
- Wireless Remote
- 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- (1 or 2) 48" or 72" Side Mount Tool Box(s)
- Rear Support Stands (Tube)
- (1 or 2) 12" MAX-Step(s)
- Additional Stake Pockets
- Under Frame Bridge
- Pipe Bridge
- In-Tongue Tool Box
- 9.5K, 12K, or 17.5K Winch Package
- 1/2" Winch plate

### OTHER OPTIONS

- Under Frame Rack
- Spread Axles 6"
- Spread Axles 72"
- Air Ride Suspension w/Lift Axle
- Ratchet Track w/Adjustable Ratchets
- Weld-on Ratchets

### NOTES

Axles also available in torsion, with electric, hydraulic, or air brakes. Under-Frame Bridge and Pipe Bridge standard on 36' and up. Dexter Heavy Duty Adjustable Suspension System standard on all tandem & triple, dual wheel configurations. 17.5" Wheels & Tires standard with 15K axle option. 12" x 22lb/ft I-Beam stanard with 15K axle option. ST215/75 R17.5 LRH Super Singles available with 10K axle option only.

For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)



# POPULAR OPTIONS



MAX-Step



MAX-Ramps



LED Light Bar



MAX-Jack (Hydraulic)



ST215/75 R17.5 Wheels & Tires




Side-mount Toolbox



Slide Track / Ratchets




Deck-Over-Neck

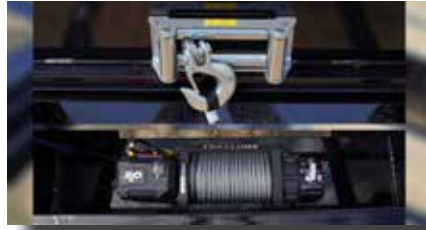

Winch/Winch Plate Combo

## KEY ADVANTAGES

- Industry Best Warranty
- Roadside Assistance
- National Dealer Network
- Commercial Grade Construction
- Dexter Oil Bath Axles
- Dexter Nev-R Adjust™ Forward Self Adjusting Electric Brake Axles
- Sherwin Williams® Powder Coat
- Primer Standard
- Radial Tires Standard
- Powder Coated Wheels
- Spare Tire Standard
- Built In Wall Charger (hydraulic dove tail models)\*
- Premium Fully Sealed Wiring Harness w/Polar Cord
- 12" I-Beam Neck/Tongue
- 12" x 19 lbs./ft I-Beam Frame
- 3" Channel Cross-members
- Stake Pockets, Pipe Spools & Rub Rails
- Front Tool Box Standard on GN Models
- Pressure Treated 2x6 Decking
- Recessed DOT Compliant LED Lighting
- NATM Compliant
- Sandblasted and Zirconium Washed
- Hand Pinstriping
- Innovative Design
- Endless Options for Customization
- Made in USA

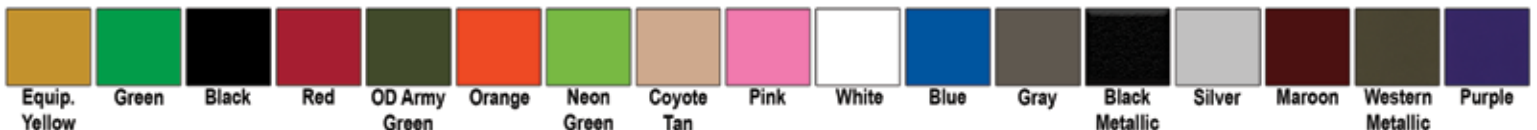

AUTHORIZED DEALER  
03-2015

