

# ***TILTS***



# **LOAD TRAIL**

# SH | SH07

## Single Axle Scissor Hauler

### 7,000 Lb GVWR

#### AVAILABLE SIZES

LENGTH	WEIGHT
60" X 10'	1,345 lbs.
60" X 12'	1,414 lbs.
77" X 10'	1,618 lbs.
77" X 12'	2,109 lbs.
*Base Weight Estimate Only	
Deck Height - 18"	



**17 COLORS  
AVAILABLE**



Stock photo. May be shown with additional options.

#### STANDARD SPECIFICATIONS

\*listed specs based on SH07 base model

- 7,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 5" Channel Tongue
- 3" X 5" Angle Frame
- 3" Channel, 16" OC Cross-members
- (1) 7,000 lb Dexter Elec/Torsion Axle (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires
- Torsion Suspension
- (1) 5,000 lb Top-wind Jack
- 2-5/16" Adjustable Coupler

- 1/8" Steel Diamond Plate Floor
- Weld-on Steel Diamond Plate Fenders
- (2) - Safety Chains
- (6) 3" D-rings
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

#### AXLE OPTIONS

(1) 7,000 Lb Dexter Elec/Torsion (FSA)

#### OTHER OPTIONS

7K Drop-Leg Jack  
Additional 3" D-rings  
Additional 4" D-rings  
Cushion Gravity Down  
Stake Pockets  
Spare Tire & Mount

#### NOTES

Axles available with electric or hydraulic brakes.  
Spare tire mount available on 12' model only.

#### COUPLER OPTIONS

2" Adjustable Coupler  
3" Adjustable Pintle Ring

# TH | TH07

## Single Axle 6" I-Beam HD Tilt

### 7,000 Lb GVWR

#### AVAILABLE SIZES

LENGTH	WEIGHT
83" X 15'	* lbs.
*Base Weight Estimate Only	
*Some sizes not available with different axle ratings.	
Deck Height - 24"	



**17 COLORS  
AVAILABLE**



Stock photo. May be shown with additional options.

#### STANDARD SPECIFICATIONS

\*listed specs based on TH07 base model

- 7,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 6" I-Beam Tongue
- 6" I-Beam Frame
- 3" Channel 16" OC Cross-members
- (1) 7,000 lb Dexter Elec/Torsion Axle (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires
- Torsion Axle Suspension
- (1) 7,000 lb Drop-Leg Jack
- 2-5/16" Adjustable Coupler

- 12 Ft Tilting Deck
- 3 Ft Stationary Deck
- (2) - Safety Chains
- Steel Diamond Plate Fenders (weld-on)
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

#### AXLE OPTIONS

(1) 7,000 Lb Dexter Elec/Torsion (FSA)

#### OTHER OPTIONS

ST235/80 R16 LRE Tires  
Steel Diamond Plate Floor  
Rough Oak Floor  
Douglas Fir Floor  
Blackwood Floor  
12" OC Cross-members  
Fork Holders  
Power Up / Power Down Hyd. System  
Rub Rail

#### OTHER OPTIONS

Additional 3" or 4" D-rings  
In-Tongue Tool Box  
Spare Tire & Mount (weld-on or removable)  
10K Drop-Leg Jack

#### OTHER OPTIONS

Winch Plate  
12K, 15K 17.5K Winch Package

#### COUPLER OPTIONS

2" Adjustable Coupler  
2-5/16" A-frame  
3" Pintle Ring

For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)





# TL10 | TL14

## 6" Channel Low-Pro Tilt

### 9,990 - 14,000 Lb GVWR

Stock photo. May be shown with additional options.



## AVAILABLE SIZES

LENGTH	WEIGHT
83" X 20'	3,467 lbs.
83" X 21'	3,607 lbs.
83" X 22'	3,747 lbs.
*Base Weight Estimate Only	
*Deck Height - 20"	



**17 COLORS  
AVAILABLE**

## STANDARD SPECIFICATIONS

*\*listed specs based on TL14 base model*

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 6" Channel Tongue
- 6" Channel Frame
- 3" Channel, 16" OC Cross-members
- (2) 7,000 lb Dexter 2 Elec/Torsion Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRD Tires
- Torsion Suspension
- (1) 10,000 lb Drop-Leg Jack
- 2-5/16" Adjustable Coupler
- Gravity 3" X 10" Cylinder w/ 1.25" Shaft
- Weld-on Steel Diamond Plate Fenders
- 2" Rub Rail, Pipe Spools & Stake Pockets
- 2" Sq. Tube-Top Front Rail w/ 2" x 2" Angle Uprights
- (2) - Safety Chains
- (6) 3" D-rings
- Treated Pine Flooring
- LED Lighting w/ Chrome Bezels
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

## AXLE OPTIONS

- (2) 5,200 Lb Dexter Elec/Torsion (FSA)
- (2) 7,000 Lb Dexter Elec/Torsion (FSA)

## OTHER OPTIONS

- Blackwood Floor
- 12" OC Cross-members
- (2) 10K Drop-Leg Jacks
- 10K Max-Jack(s) (Hydraulic)
- Solar Charger
- Wireless Remote
- Full Tilt Deck
- 4', 5', or 6' Stationary Deck
- Dual Action Hyd. Power Up/Power Down
- Additional 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- Tongue-Mount Tool Box
- Spare Tire & Mount (weld-on or removable)
- Winch Plate
- 12K, 15K 17.5K Winch + Plate Combo

## NOTES

Axles available with electric or hydraulic brakes. Must select power up/power down option to select wireless remote option.

## COUPLER OPTIONS

- 2" Adjustable Coupler
- 2-5/16" Adjustable Coupler
- 2-5/16" A-frame

## OTHER OPTIONS

- ST225/75 LRE R15
- ST235/80 R16 LRE Tires
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor



For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)



**TH10 | TH14 | TH16 | TH21**

**8" I-Beam Tilt-N-Go**

**9,990 - 21,000 Lb GVWR**

Stock photo. May be shown with additional options.



## AVAILABLE SIZES

LENGTH	WEIGHT
83" X 18'	4,000 lbs.
83" X 20'	4,100 lbs.
83" X 22'	4,200 lbs.
83" X 24'	4,300 lbs.
*Base Weight Estimate Only	
Deck Height - 24"	



**17 COLORS  
AVAILABLE**

## STANDARD SPECIFICATIONS

*\*listed specs based on TH14 base model*

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 8" I-Beam Tongue
- 8" I-Beam Frame
- 3" Channel, 16" OC Cross-members
- (2) 7,000 lb Dexter 2 Elec/Torsion Axle (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires
- Torsion Axle Suspension
- (1) 10,000 lb Drop-Leg Jack
- 2-5/16" Adjustable Coupler
- Gravity 3" X 10" Cylinder w/ 1.25" Shaft
- Weld-on Steel Diamond Plate Fenders
- (2) - Safety Chains
- (6) 3" D-rings
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

## AXLE OPTIONS

- (2) 5,200 Lb Dexter Elec/Torsion (FSA)
- (2 or 3) 7,000 Lb Dexter Elec/Torsion (FSA)
- (2) 8,000 Lb Dexter Elec/Torsion \*Down (FSA)

## COUPLER OPTIONS

- 2" Adjustable Coupler
- 2-5/16" Adjustable Coupler
- 2-5/16" A-frame
- 3" Pintle Ring

## OTHER OPTIONS

- ST235/80 R16 LRE Tires
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor

## OTHER OPTIONS

- Blackwood Floor
- 12" OC Cross-members
- Fork Holders
- (2) 10K Drop-Leg Jacks
- 10K Max-Jack(s) (Hydraulic)
- Wireless Remote
- Power Up / Power Down Hyd. Pump
- 2', 4', 6' or 8' Stationary Deck
- Additional 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- Rub Rail
- In-Tongue Tool Box
- Spare Tire & Mount (weld-on or removable)
- Winch Plate
- 12K, 15K 17.5K Winch + Plate Combo
- In-Tongue Tool Tray

## NOTES

- Axles available with electric or hydraulic brakes.
- 2' stationary available on 18 ft. & up.
- 4' Stationary available on 20 ft. & up.
- 6' stationary available on 22 ft. & up.
- 8' stationary available on 24 ft. & up.
- Deck height changes to 26" w/8K axle option.



For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)



# PE

**PE14 | PE16 | PE21**  
**10" I-Beam Pintle Equipment Tilt**  
**14,000 - 21,000 Lb GVWR**

Stock photo. May be shown with additional options.



**AVAILABLE SIZES**

LENGTH	WEIGHT
102" X 22'	5,353 lbs.
102" X 24'	5,774 lbs.
102" X 26'	6,183 lbs.
102" X 28'	6,592 lbs.
102" X 30'	7,001 lbs.
*Base Weight Estimate Only	
Deck Height - 35"	



**18" IN-FLOOR ROLLERS AVAILABLE**



**TRIPLE AXLE AVAILABLE**



**17 COLORS AVAILABLE**

**STANDARD SPECIFICATIONS**

*\*listed specs based on PE14 base model*

<ul style="list-style-type: none"> <li>• 14,000 lb GVWR</li> <li>• 7,000 lb GAWR (ea. axle)</li> <li>• 10" I-Beam Tongue</li> <li>• 10" I-Beam Frame</li> <li>• 6" I-Beam Deck Frame</li> <li>• 3" Channel, 16" OC Cross-members</li> <li>• (2) 7,000 lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)</li> <li>• 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires +Spare</li> <li>• Multi-Leaf Spring Suspension</li> <li>• (2) 10,000 lb Drop-Leg Jacks</li> <li>• 2-5/16" Adjustable Coupler</li> <li>• Power Up/Power Down Hydraulic System</li> <li>• 22 ft. Standard Tilting Deck</li> </ul>	<ul style="list-style-type: none"> <li>• 5" X 15.75" Cylinder w/ 2" Shaft &amp; Scissor Hoist</li> <li>• Interstate Battery w/ Built-In Battery Charger (wall-mount)</li> <li>• Full-Width Front Tool Box</li> <li>• Side-Mount Tool Box</li> <li>• 2" Rub Rail, Pipe Spools &amp; Stake Pockets</li> <li>• (2) - Safety Chains</li> <li>• (4) 3" D-rings</li> <li>• Treated Pine Flooring</li> <li>• LED Lighting</li> <li>• 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug &amp; Front Polar Cord</li> <li>• Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion</li> <li>• Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat</li> </ul>
--	---

**AXLE OPTIONS**

(2 or 3) 7,000 Lb Dexter Elec/Spring (FSA)  
 (2 or 3) 8,000 Lb Dexter Elec/Spring (FSA)

**COUPLER OPTIONS**

3" Adjustable Pintle Ring

**OTHER OPTIONS**

ST215/75 R17.5 LRH Tires  
 Steel Diamond Plate Floor  
 Rough Oak Floor  
 Douglas Fir Floor  
 Blackwood Floor  
 12" OC Cross-members

**OTHER OPTIONS**

(2) 25K Drop-Leg Jacks  
 10K Max-Jack(s) (Hydraulic)  
 Solar Charger  
 8 Amp Battery Charger  
 Wireless Remote  
 LED Light Bar (single or dual row)  
 2', 4', 6' or 8' Stationary Deck  
 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)  
 (1 or 2) MAX-Step (12" Side Step)  
 48" Side-Mount Tool Box  
 Under-Frame Bridge  
 In-Tongue Tool Box  
 Winch Plate  
 12K, 15K 17.5K Winch Package  
 Winch Plate  
 Slide Track w/ Adjustable Ratchets  
 24 ft. tilting deck

**NOTES**

Axles available in straight or torsion, with electric or hydraulic brakes. 2' stationary deck available on 24' & up models. 2' stationary available on 18 ft. & up. 4' Stationary available on 20 ft. & up. 6' stationary available on 22 ft. & up. 8' stationary available on 24 ft. & up.



For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)

# PT |

**PT22 | PT24 | PT30**  
**12" I-Beam HD Pintle Equipment Tilt**  
**22,000 - 30,000 Lb GVWR**

Stock photo. May be shown with additional options.



**AVAILABLE SIZES**

LENGTH	WEIGHT
102" X 26'	8,141 lbs.
102" X 28'	8,461 lbs.
102" X 30'	8,751 lbs.
102" X 32'	9,099 lbs.
102" X 34'	9,414 lbs.
102" X 36'	9,765 lbs.
102" X 38'	10,058 lbs.
102" X 40'	11,017 lbs.
*[Base Weight Estimate Only]	
Deck Height - 36"	



**18" IN-FLOOR ROLLERS AVAILABLE**



**STANDARD ON ALL TANDEM & TRIPLE, DUAL WHEEL CONFIGURATIONS**



**17 COLORS AVAILABLE**

**STANDARD SPECIFICATIONS**

*\*listed specs based on PT22 base model*

- 22,000 lb GVWR
- 10,000 lb GAWR (ea. axle)
- 12" I-Beam Tongue
- 12" I-Beam Frame
- 10" I-Beam Deck Frame
- 3" Channel, 16" OC Cross-members
- (2) 10,000 lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Dual Wheels w/ ST235/80 R16 LRE Tires +Spare
- HDSS | Heavy Duty Adjustable Suspension System
- (2) 10,000 lb Drop-Leg Jacks
- 3" Adjustable Pintle Ring Coupler
- Power Up/Power Down Hydraulic System
- 6" X 29" Cylinder w/ 2-3/4" Shaft w/ Scissor Hoist
- Interstate Battery w/ Built-In Battery Charger (wall-mount)
- Side-Mount Tool Box
- 2" Rub Rail, Pipe Spools & Stake Pockets
- (2) - Safety Chains
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

**AXLE OPTIONS**

- (2) 10,000 Lb Dexter Elec/Spring (FSA)
- (2) 12,000 Lb Dexter Elec/Spring (FSA)
- (2) 15,000 Lb Dexter Elec/Spring (FSA)

**COUPLER OPTIONS**

2-5/16" Adjustable Turtle Mount Coupler

**OTHER OPTIONS**

- ST215/75 R17.5 LRH Tires
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Floor
- 12" OC Cross-members

**OTHER OPTIONS**

- (2) 25K Drop-Leg Jacks
- 10K Max-Jack(s) (Hydraulic)
- Solar Charger
- 8 Amp Battery Charger
- Wireless Remote
- LED Light Bar (single or dual row)
- 2', 4', 6' or 8' Stationary Deck
- 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- (1 or 2) MAX-Step (12" Side Step)
- 48" Side-Mount Tool Box
- Under-Frame Bridge
- Pipe Bridge
- 18" In-Floor Rollers
- 12K, 15K 17.5K Winch Package
- Winch Plate
- Weld-On Ratchets
- Slide Track w/ Adjustable Ratchets

**NOTES**

Axles available in straight or torsion, with electric or hydraulic disc or drum brakes. Stationary deck available, see dealer for details.



# GN

## GN10 | GN14 | GN16 | GN21

### 8" I-Beam Gooseneck Tilt-N-Go

### 9,990 - 21,000 Lb GVWR

Stock photo. May be shown with additional options.



### AVAILABLE SIZES

LENGTH	WEIGHT
83" X 18'	4,640 lbs.
83" X 20'	4,740 lbs.
83" X 22'	4,950 lbs.
83" X 24'	5,200 lbs.
83" X 26'	5,400 lbs.
*Base Weight Estimate Only Deck Height - 24"	



**TRIPLE AXLE  
AVAILABLE**



**17 COLORS  
AVAILABLE**

### STANDARD SPECIFICATIONS

\*listed specs based on GN14 base model

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 10" I-Beam Neck
- 8" I-Beam Frame
- 3" Channel, 16" OC Cross-members
- (2) 7,000 lb Dexter Elec/Torsion Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R15 LRE Tires + Spare
- Torsion Axle Suspension
- (1) 10,000 lb Drop-Leg Jacks
- 2-5/16" Adjustable Round Gooseneck Coupler
- Gravity 3" X 10" Cylinder w/ 1.25" Shaft
- Weld-on Steel Diamond Plate Fenders
- 2 Ft Stationary Deck
- Full-width Front Tool Box
- (6) 3" Weld-On D-Rings
- (2) - Safety Chains
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

### AXLE OPTIONS

- (2) 5,200 Lb Dexter Elec/Torsion (FSA)
- (2 or 3) 7,000 Lb Dexter Elec/Torsion (FSA)
- (2) 8,000 Lb Dexter Elec/Torsion \*Down (FSA)

### COUPLER OPTIONS

- 2-5/16" Adjustable Square GN Coupler

### OTHER OPTIONS

- ST215/75 R17.5 LRH Tires
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Floor
- 12" OC Cross-members

### OTHER OPTIONS

- Locking Chain Rack
- Fork Holders
- (2) 10K Drop-Leg Jacks
- (2) 25K Drop-Leg Jacks
- 10K Max-Jack(s) (Hydraulic)
- Power Up/Power Down Hyd. System
- Solar Charger
- 8 Amp Battery Charger
- Wireless Remote
- LED Light Bar (single or dual row)
- 2', 4', 6' or 8' Stationary Deck
- Additional 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- Rub Rail
- (1 or 2) MAX-Step (12" Side Step)
- Top-Riser Tool Box
- 12K, 15K 17.5K Winch Package
- Winch Plate

### NOTES

Axles available in straight or torsion, with electric or hydraulic brakes. 24 ft. & up models receive tandem 10K jacks. 8 amp charger & wireless remote available only with power up/ power down option.



For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)

# GE

## GE14 | GE16 | GE21 10" I-Beam Gooseneck Equipment Tilt 14,000 - 21,000 Lb GVWR

Stock photo. May be shown with additional options.



### AVAILABLE SIZES

LENGTH	WEIGHT
102" X 22'	5940 lbs.
102" X 24'	6159 lbs.
102" X 26'	6518 lbs.
102" X 28'	6877 lbs.
102" X 30'	7236 lbs.
102" X 32'	7595 lbs.
*Base Weight Estimate Only Deck Height - 35"	



**18" IN-FLOOR ROLLERS  
AVAILABLE**



**TRIPLE AXLE  
AVAILABLE**



**17 COLORS  
AVAILABLE**

### STANDARD SPECIFICATIONS

*\*listed specs based on GE14 base model*

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 10" I-Beam Neck
- 10" I-Beam Frame
- 6" I-Beam Deck Frame
- 3" Channel, 16" OC Cross-members
- (2) 7,000 lb Dexter Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires + Spare
- Multi-Leaf Spring Suspension
- (2) 10,000 lb Drop-Leg Jacks
- 2-5/16" Adjustable Round Gooseneck Coupler
- Power Up/Power Down Hydraulic System
- 5" X 15.75" Cylinder w/ 2" Shaft
- Scissor Hoist
- Interstate Battery w/ Built-In Battery Charger (wall-mount)
- 2" Rub Rail, Pipe Spools, & Stake Pockets
- Full-Width Front Tool Box
- Side-Mount Tool Box
- (2) - Safety Chains
- (6) 3" D-rings
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

### AXLE OPTIONS

(2 or 3) 7,000 Lb Dexter Elec/Spring (FSA)

(2 or 3) 8,000 Lb Dexter Elec/Spring (FSA)

### COUPLER OPTIONS

2-5/16" Adjustable Square GN Couple

### OTHER OPTIONS

ST215/75 R17.5 LRH Super Singles

Steel Diamond Plate Floor

Rough Oak Floor

Douglas Fir Floor

Blackwood Floor

12" OC Cross-members

### OTHER OPTIONS

Locking Chain Rack

(2) 10K Drop-Leg Jacks

(2) 25K Drop-Leg Jacks

10K Max-Jack(s) (Hydraulic)

Solar Charger

8 Amp Battery Charger

Wireless Remote

LED Light Bar (single or dual row)

2', 4', 6' or 8' Stationary Deck

3" or 4" D-rings (weld-on, bolt-on, recessed or removable)

(1 or 2) MAX-Step (12" Side Step)

48" Side-Mount Tool Box

Under-Frame Bridge

Fold-Down Spare Tire Mount

Top-Riser Tool Box

12K, 15K 17.5K Winch Package

Winch Plate

Weld-On Ratchets

Slide Track w/ Adjustable Ratchets

### NOTES

Axles available in straight or torsion, with electric or hydraulic brakes. 2' stationary deck available on 24' & up models. 2' stationary available on 18 ft. & up. 4' Stationary available on 20 ft. & up, 6' stationary available on 22 ft. & up, 8' stationary available on 24 ft. & up.



For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)



# GT

## GT22

### 12" I-Beam HD Gooseneck Equipment Tilt 22,000 Lb GVWR

Stock photo. May be shown with additional options.



#### AVAILABLE SIZES

LENGTH	WEIGHT
102" X 26'	8854 lbs.
102" X 28'	9174 lbs.
102" X 30'	9494 lbs.
102" X 32'	9813 lbs.
102" X 34'	10166 lbs.
102" X 36'	10518 lbs.
102" X 38'	10811 lbs.
102" X 40'	11104 lbs.
*Base Weight Estimate Only Deck Height - 36"	



**18" IN-FLOOR ROLLERS  
AVAILABLE**



**STANDARD ON ALL TANDEM  
& TRIPLE, DUAL  
WHEEL CONFIGURATIONS**



**17 COLORS  
AVAILABLE**

#### STANDARD SPECIFICATIONS

- 22,000 lb GVWR
- 10,000 lb GAWR (ea. axle)
- 12" I-Beam Neck
- 12" I-Beam Frame
- 10" I-Beam Deck Frame
- 3" Channel, 16" OC Cross-members
- (2) 10,000 lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Dual Wheels w/ ST235/80 R16 LRE Tires + Spare
- HDSS | Heavy Duty Adjustable Suspension System
- (2) 10,000 lb Drop-Leg Jacks
- -5/16" Round Adjustable Gooseneck Ring Coupler
- Power Up/Power Down Hydraulic System
- 6" X 29" Cylinder w/ 2-3/4" Shaft & Scissor Hoist
- Interstate Battery w/ Built-In Battery Charger (wall-mount)
- Full-Width Front Tool Box
- 2" Rub Rail, Pipe Spools, & Stake Pockets
- Side-Mount Tool Box
- (2) - Safety Chains
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

#### AXLE OPTIONS

- (2) 10,000 Lb Dexter Elec/Spring (FSA)
- (2) 12,000 Lb Dexter Elec/Spring (FSA)
- (2) 15,000 Lb Dexter Elec/Spring (FSA)

#### COUPLER OPTIONS

- 2-5/16" Adjustable Square GN Coupler

#### OTHER OPTIONS

- ST215/75 R17.5 LRH Tires
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Floor
- 12" OC Cross-members
- (2) 25K Drop-Leg Jacks

#### OTHER OPTIONS

- 10K Max-Jack(s) (Hydraulic)
- Solar Charger
- 8 Amp Battery Charger
- Wireless Remote
- LED Light Bar (single or dual row)
- 2', 4', 6' or 8' Stationary Deck
- 3" or 4" D-rings (weld-on, bolt-on, recessed or removable)
- (1 or 2) MAX-Step (12" Side Step)
- 48" Side-Mount Tool Box
- Under-Frame Bridge
- Pipe Bridge
- Spare Tire & Mount (weld-on or removable)
- 18" In-Floor Rollers
- 12K, 15K 17.5K Winch Package
- Winch Plate
- Weld-On Ratchets
- Slide Track w/ Adjustable Ratchets
- Top-Riser Tool Box
- Fold-Down Spare Tire Mount


#### NOTES

Axles available in straight or torsion, with electric or hydraulic disc or drum brakes. 2' stationary deck available on 24' & up models. 2' stationary available on 18 ft. & up. 4' Stationary available on 20 ft. & up, 6' stationary available on 22 ft. & up, 8' stationary available on 24 ft. & up.



For a complete list of options available for this model, visit us at [www.loadtrail.com](http://www.loadtrail.com)

# POPULAR OPTIONS

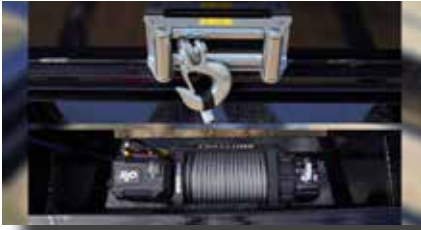

**Winch/Winch Plate Combo**



**MAX-Jacks (Hyd.)**



**Blackwood Floor**



**MAX-Step**



**LED Light Bar**



**ST215/75 R17.5 Wheels&Tires**



**Wireless Remote**




**Deck-Over-Neck**



**18" In-Floor Rollers**

## KEY ADVANTAGES

- Industry Best Warranty
- Roadside Assistance
- National Dealer Network
- Commercial Grade Construction
- Dexter E-Z Lube Axles
- Dexter Nev-R Adjust™ Forward Self Adjusting Electric Brake Axles
- Sherwin Williams® Powder Coat
- Primer Standard
- Radial Tires Standard
- Powder Coated Wheels
- Locking Tilt Mechanism
- Built-In Wall Charger
- Cushioned Lowering System
- Premium Fully Sealed Wiring Harness w/Polar Cord
- Bladed Tail For Easy Loading
- Stake Pockets & D-rings
- Pressure Treated 2x6 Decking
- Recessed DOT Compliant LED Lighting
- NATM Compliant
- Sandblasted and Zirconium Washed
- Hand Pinstriping
- Innovative Design
- Endless Options for Customization
- Made in USA

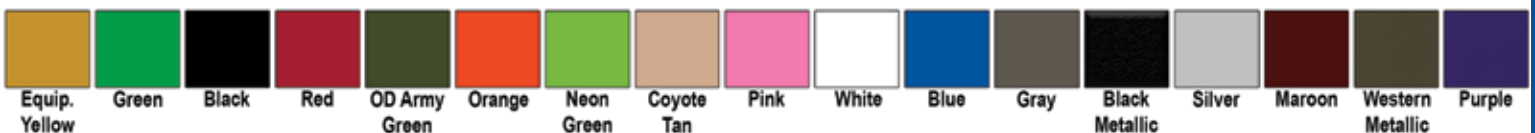

AUTHORIZED DEALER  
03-2015

